




**F880 catch basin with stainless steel frame**

Catch basin

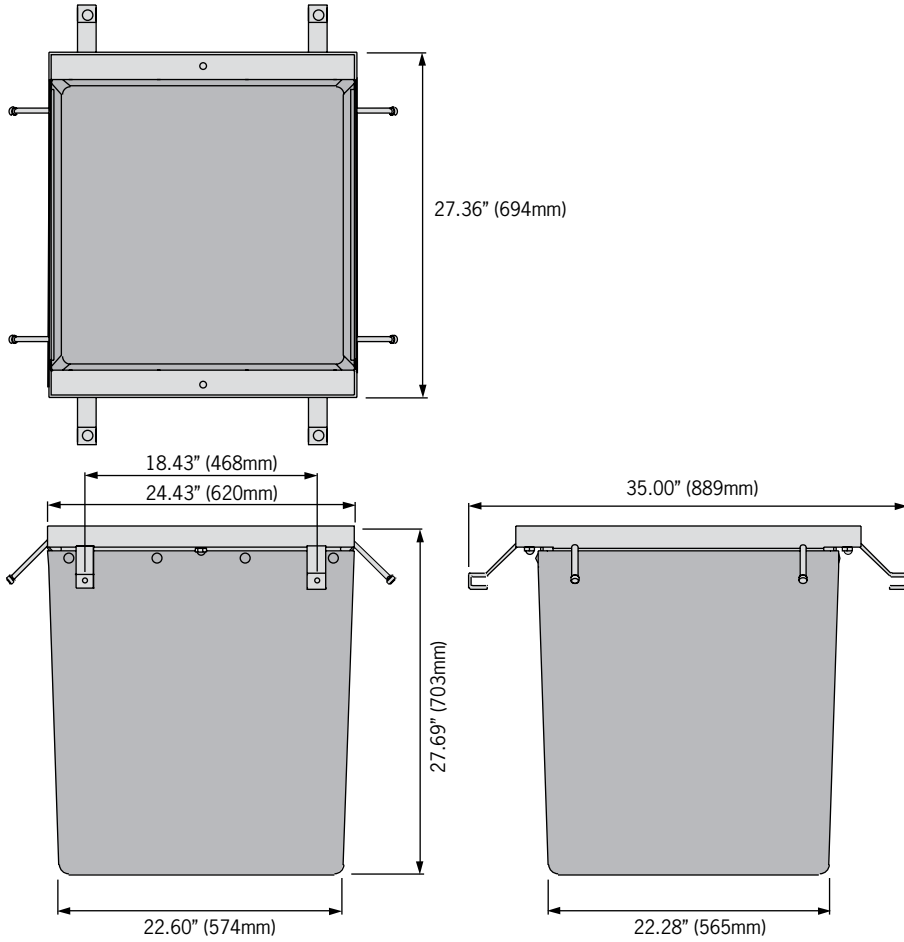


**FG200 Channel collar**

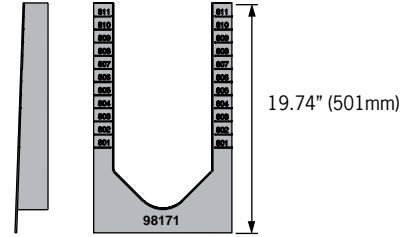

**Pipe adapter**

- A:** 7.31" (187mm)
- B:** 9.40" (239mm)
- C:** 11.40" (289mm)

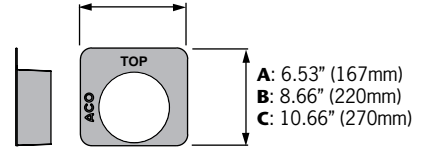

- A:** 4" Pipe plain end adapter
- B:** 6" Pipe plain end adapter
- C:** 8" Pipe plain end adapter

**Outlet flow rates**

Outlet	Product	Outlet size (Sch. 40)	Invert Depth	GPM	CFS
97425	F880*	4" round	27.5 max	275	0.61
97438	F880*	6" round	27.5 max	606	1.35
97444	F880*	8" round	27.5 max	1055	2.35

**Note:** These are the pipe flow rates at the specified outlet, **NOT** channel flow rates.  
 \*Catch basin flow rates are without trash bucket - using trash bucket reduces flow.  
 Total capacity = 55.00 gallons  
 F880 fits FG200 trench system

ACO Specification Information

# ACO DRAIN

## F880 catch basin with stainless steel frame



ACO Specification Information

Description	Part No.	Overall Depth		Weight lbs.
		inches	mm	
F880 Catch basin body <sup>Ⓞ</sup>	98075	27.7	703	22.0
F880 Stainless steel frame*	98048	3.13	79	24.2
F880 Plastic trash bucket	98059	6.75	172	8.4
<b>Accessories</b>				
4" pipe plain end adapter	97425	6.53	167	0.4
6" pipe plain end adapter	97438	8.66	220	0.6
8" pipe plain end adapter	97444	10.66	270	0.9
FG200 Channel/catch basin collar	98171	19.74	501	1.1

### Notes:

1. Invert and overall depths are for the channel body & frame assembled
  2. If foul air trap required, place contact ACO
  3. For invert depth subtract 0.125" (3mm)
- \* Grade 304 stainless steel
4. F880 catch basin fits FG200 trench system

### Specifications

#### General

The catch basin shall be ACO Drain F880 catch basin, complete with stainless steel frame and bolted gratings as manufactured by ACO, Inc. or equal approved.

#### Materials

The unit bodies shall be manufactured from fiberglass, with minimum properties as follows:

Compressive strength: 24,400 psi  
Flexural strength: 9,943 psi  
Water absorption 0.33%  
Frost proof  
Salt proof  
Dilute acid and alkali resistant

The nominal clear opening shall be 23.17" (588mm) wide by 23.56" (598mm) long. Overall width of 27.36" (694mm) wide by 24.43" (620mm) long.

Units shall be manufactured with a wall thickness of at least 0.125" (3mm)

The fiberglass catch basin body shall be fixed to the frame using push fit nylon studs.

Frames shall be manufactured from Grade 304 stainless steel and shall incorporate anchoring features to ensure maximum mechanical bond to the surrounding bedding material and pavement surface. Frames shall incorporate installation brackets to ensure correct and easy installation. Frames shall be at least 3/16" (5mm) thick.

#### Grates

Grates should be specified. See separate ACO Spec Info grate sheets for details.

#### Installation

The catch basin shall be installed in accordance with the manufacturer's installation instructions and recommendations.

### ACO, Inc.

**Northeast Sales Office**  
9470 Pinecone Drive  
Mentor, OH 44060  
Tel: (440) 639-7230  
Toll free: (800) 543-4764  
Fax: (440) 639-7235

**West Sales Office**  
825 W. Beechcraft St.  
Casa Grande, AZ 85122  
Tel: (520) 421-9988  
Toll Free: (888) 490-9552  
Fax: (520) 421-9899

**Southeast Sales Office**  
4211 Pleasant Road  
Fort Mill, SC 29708  
Toll free: (800) 543-4764  
Fax: (803) 802-1063



**Electronic Contact:**  
info@ACODrain.us  
www.ACODrain.us



© April 2018, ACO, Inc. This information is believed to be accurate but it is not guaranteed to be so. We cannot assume liability for results that buyer obtains with our product since conditions of use are beyond the control of the company. It is the customer's responsibility to evaluate suitability and safety of product for his own use. ACO, Inc. reserves the right to change the product and specifications without notice.

April 2018

www.ACODrain.us