

### Product Features

- Certified to EN 1433 Load Class E - 135,000 lbs. - 2,321 psi
- Uses 'QuickLok' boltless locking system
- Suitable for use with K200, KS200, H200K-13, and H200KS-13 channels
- Manufactured from ductile iron to ASTM A 536-84 - Grade 65-45-12
- E- coated for improved resistance against rust



### Specifications

#### General

The surface drainage system shall be ACO Drain K200, KS200, H200K-13, and H200KS-13 channels\* complete with ACO Type 661Q ductile iron slotted grate with 'QuickLok' locking as manufactured by ACO, Inc. or similar approved.

#### Materials

The covers shall be manufactured from ductile iron and have **minimum** properties as follows:

- **Independently certified to meet Load Class E to EN 1433 - 135,000 lbs - 2,321 psi**
- **Ductile iron to ASTM A 536-84 - Grade 65-45-12**
- **Intake area of 81.89 sq. in. (528.32 cm<sup>2</sup>) per half meter of grate**

The overall width of 9.37" (238mm) and overall length of 19.69" (500mm). Slots measure at a maximum of 3.75" (95mm).

#### Installation

The trench drain system and grates shall be installed in accordance with the manufacturer's installation instructions and recommendations.


\* delete as appropriate

# ACO DRAIN



## Type 661Q Ductile iron slotted grate



ACO Specification Information

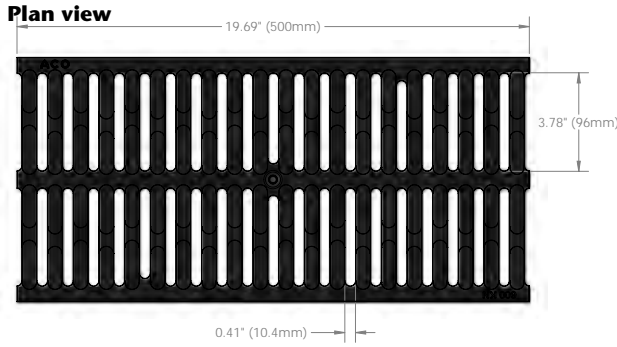

Side elevation



Description	Part No.	Length inches (mm)	Width inches (mm)	Weight lbs.
QuickLok grate				
Type 661Q Ductile iron slotted grate	<b>10351</b>	19.69 (500)	9.41 (239)	37.0
QuickLok locking bar	<b>10457</b>	-	-	0.5
QuickLok grate removal tool	<b>01318</b>	-	-	0.3

**'QuickLok' locking mechanism**

- Channel
- Grate
- 'QuickLok' locking stud (fixed to grate)
- 'QuickLok' locking spring (fixed to locking bar)
- 'QuickLok' locking bar (side and plan views)

ACO 'QuickLok' is a patented boltless locking system, grates are removed and replaced with the minimum time and effort for ease of maintenance. The unique design provides a positive 'snap down' fit into the locking bar. A stud is fixed into the grate which 'locks' into the spring clip in the locking bar.

The 'QuickLok' stud is made from stainless steel and high density nylon, the locking bar and clip are stainless steel, for use in both general purpose and corrosive environments.

**ACO, Inc.**  
**Northeast Sales Office**  
 9470 Pinecone Drive  
 Mentor, Ohio 44060  
 Tel: (440) 639-7230  
 Toll free: (800) 543-4764  
 Fax: (440) 285-7005

**West Sales Office**  
 825 W. Beechcraft St.  
 Casa Grande, AZ 85122  
 Tel: (520) 421-9988  
 Toll Free: (888) 490-9552  
 Fax: (520) 421-9899

**Southeast Sales Office**  
 4211 Pleasant Road  
 Fort Mill, SC 29708  
 Toll free: (800) 543-4764  
 Fax: (803) 802-1063

Follow us on  
  
**Electronic Contact:**  
 info@ACODrain.us  
 www.ACODrain.us



© April 2018, ACO, Inc. This information is believed to be accurate but it is not guaranteed to be so. We cannot assume liability for results that buyer obtains with our product since conditions of use are beyond the control of the company. It is the customer's responsibility to evaluate suitability and safety of product for his own use. ACO, Inc. reserves the right to change the product and specifications without notice.