



Product Features

- Certified to EN 1433 Load Class F - 200,000 lbs - 3,481 psi
- Uses '4-bolt' boltless locking system
- Suitable for use with S300K and H300SK-13 channels
- Manufactured from ductile iron to ASTM A 536-84 - Grade 65-45-12
- Bicycle Tire Penetration Resistant to AS 3996 - 2006



ACO Specification Information

Specifications

General

The surface drainage system shall be ACO PowerDrain or SlabDrain, complete with ACO 4 Bolt iron grate with '4-bolt' locking as manufactured by ACO, Inc. or similar approved.

Materials

The covers shall be manufactured from ductile iron and have **minimum** properties as follows:

- **Independently certified to meet Load Class F to EN 1433 - 200,000 lbs - 3,481psi**
- **Ductile iron to ASTM A 536-84 - Grade 65-45-12**
- **Intake area of 115.5 sq. in. (745.12 cm²) per half meter of grate**

The overall width of 13.25" (336mm) and overall length of 19.69" (500mm). Slots measure at 0.71"(18.03mm) by 3.75" (95.25mm).

Installation

The trench drain system and grates shall be installed in accordance with the manufacturer's installation instructions and recommendations.


* delete as appropriate

ACO DRAIN


S300K 4-Bolt ductile iron grate



Plan view

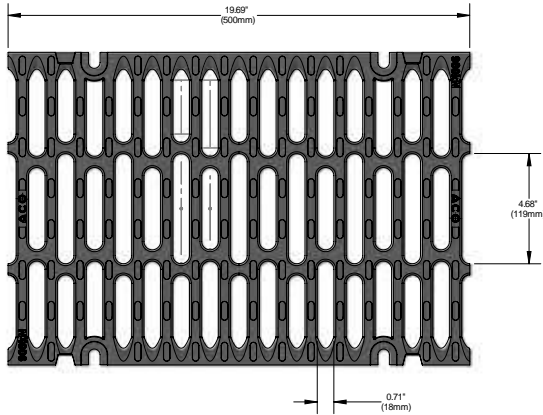

Side elevation

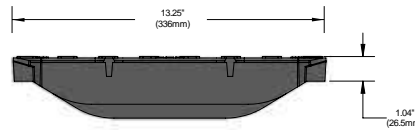

ACO Specification Information

Description	Part No.	Length inches (mm)	Width inches (mm)	Weight lbs.
4-Bolt grate 4-bolt ductile iron grate	99592	19.69 (500)	13.25 (336)	55.75

'4-Bolt' locking mechanism



ACO offers a 4-bolt locking solution for applications requiring more security. The four threaded stainless steel inserts in the PowerDrain channel body allow a 4-bolt grate to be bolted into the channel for ultimate stiffness and security. Tamper resistant bolts can also be used.

ACO, Inc.
Northeast Sales Office
 9470 Pinecone Drive
 Mentor, OH 44060
 Tel: (440) 639-7230
 Toll free: (800) 543-4764
 Fax: (440) 639-7235

West Sales Office
 825 W. Beechcraft St.
 Casa Grande, AZ 85122
 Tel: (520) 421-9988
 Toll Free: (888) 490-9552
 Fax: (520) 421-9899

Southeast Sales Office
 4211 Pleasant Road
 Fort Mill, SC 29708
 Toll free: (800) 543-4764
 Fax: (803) 802-1063



Electronic Contact:
 info@ACODrain.us
 www.ACODrain.us



© April 2018, ACO, Inc. This information is believed to be accurate but it is not guaranteed to be so. We cannot assume liability for results that buyer obtains with our product since conditions of use are beyond the control of the company. It is the customer's responsibility to evaluate suitability and safety of product for his own use. ACO, Inc. reserves the right to change the product and specifications without notice.

April 2018

www.ACODrain.us